
Framing Information: 25H Three Sided (TS) (Screen & Double Glass)



Framing Dimensions

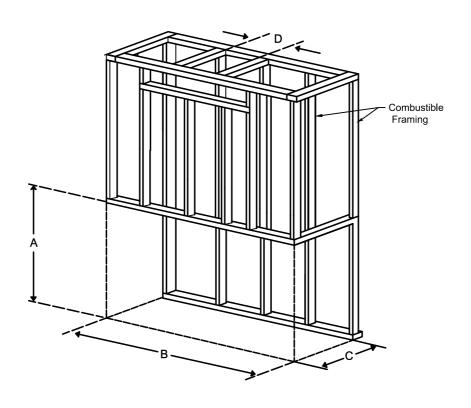

| Model | А | В | С | D |
|--------|-------------------|---|---------|--|
| 25H TS | 43 1/8" 30 11/16" | | 25 1/8" | Refer to Vent Manufacturer's Firestop Dimensions |

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE

SELF-SUPPORTED.

Framing Information: 25H Three Sided (TS) (Screen & Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing _____ Section View Elevation View Air Intake Add drywall nailer as needed. (required for double glass only) Top View The valve can be moved 36" from the center of the fireplace in any direction

Note: 1. Drawings are not to Scale


2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

Framing Information: 25H Three Sided (TS) (Screen & Double Glass)





Fireplace Dimensions





Side View





| Model | (H) | (W) | (D) | C1 | C2 | C3 | Viewing Area | |
|---------|--------|------------------------------------|-------|---------|--------|-------|--|--|
| IVIOGCI | Height | Width | Depth | | 02 | | Front | Side |
| 25H TS | 43 %" | 30 ¹⁰ / ₁₆ " | 25 ½" | 6 7/16" | 15 ½6" | 15 %" | 29 ½" W X 23 ¹³ ⁄ ₁₆ " H | 19 %" W X 23 ¹³ / ₁₆ " H |

Note: 1. Drawings are not to Scale

2. All dimensions in inches